


# TAPER DIMENSIONS AND ELECTRODE CODING

T.J. Snow Co. (423) 894-6234; FAX: (423) 490-2417 (authorized distributor CMW Inc.)

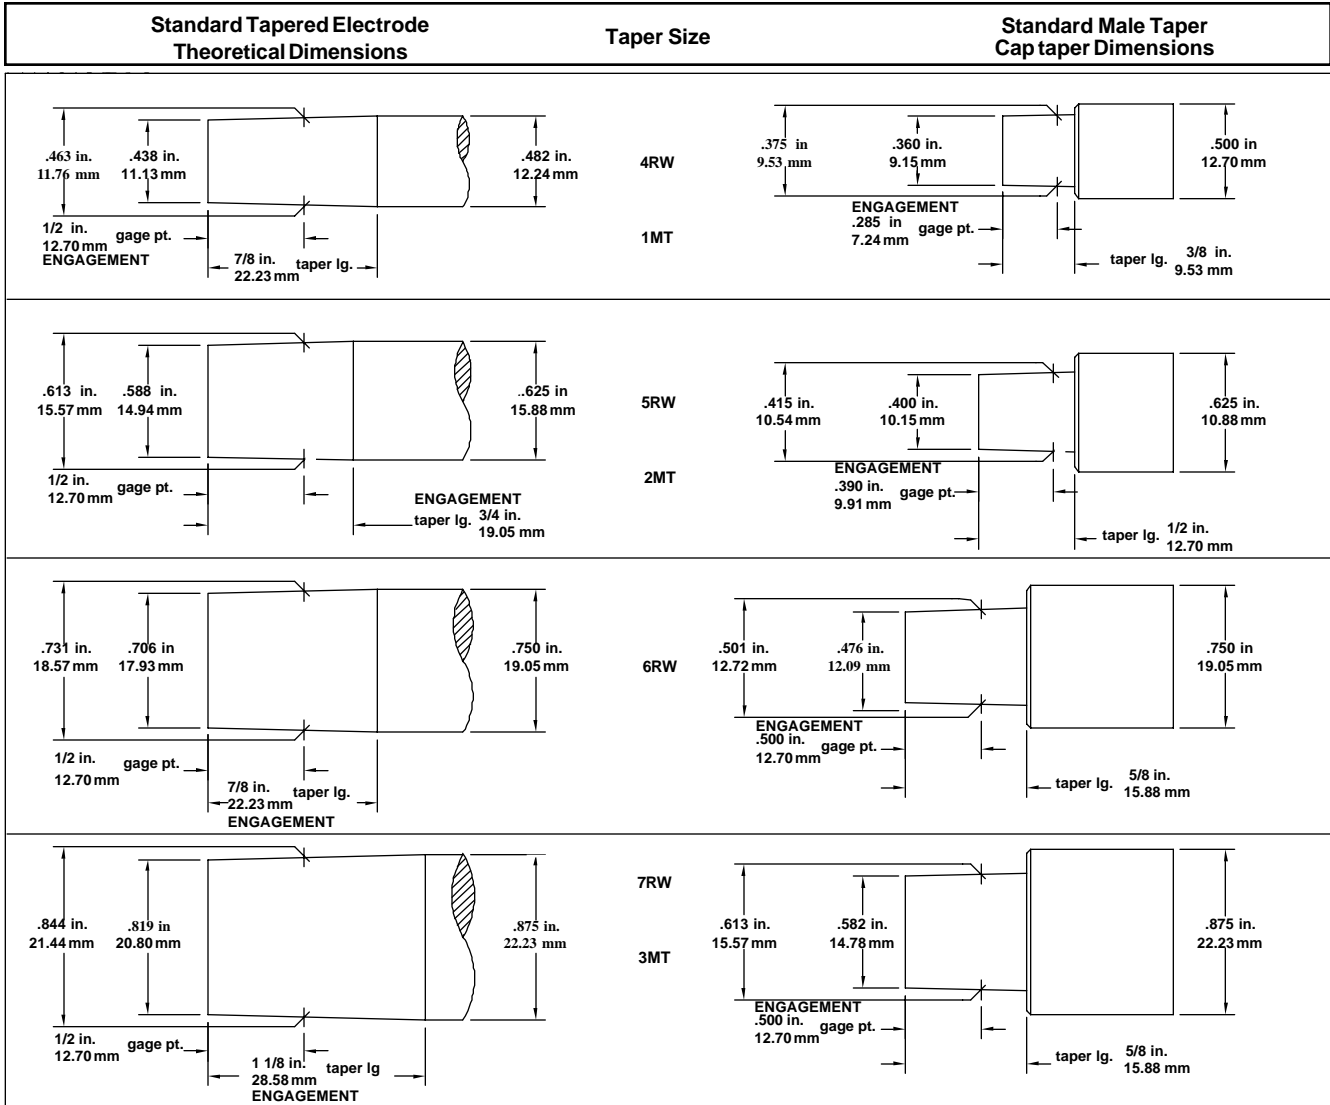

## CMW CODING

Drawings Full Size

### FOR STRAIGHT TAPERED ELECTRODES

Material	Nose	Attachment	Length
1 = CMW® 28	1 = Dome	1 = No. 4RW	1 = 1"
	2 = Pointed	No. 1MT	2 = 1 1/4"
3 = CMW® 3	3 = Flat		3 = 1 1/2"
5 = CMW® 100	4 = Offset	2 = No. 5RW	4 = 1 3/4"
6 = ELKONITE® 10W3	5 = 2" Sph. R	No. 2MT	5 = 2"
	6 = 10" Sph. R.		6 = 2 1/4"
7 = ELKONITE® TC5	7 = Truncated	3 = No. 7RW	7 = 2 1/2"
8 = ELKON® 100M	8 = 3" Sph. R	No. 3MT	8 = 2 3/4"
9 = ELKON® 100W	9 = 4" Sph. R		9 = 3"
	0 = Shank for Male Cap	4 = No. 6RW	12 = 3 1/4"
			14 = 3 1/2"
			16 = 3 3/4"
			18 = 4"
			20 = 4 1/4"
			22 = 4 1/2"
Note: Prefix MP = Shank for Female Cap			

## RWMA CODING

### FOR STRAIGHT TAPERED ELECTRODES

Nose	Material	Attachment	Length in no. of 1/4"
A = Pointed	1 = RWMA CL 1 CMW® 28	4 = No. 4RW	04 = 1"
		No. 1MT	05 = 1 1/4"
			06 = 1 1/2"
B = Dome	2 = RWMA CL 2 CMW® 3	5 = No. 5RW	07 = 1 3/4"
		No. 2MT	08 = 2"
			09 = 2 1/4"
C = Flat	3 = RWMA CL 3 CMW® 100	6 = No. 6RW	10 = 2 1/2"
			11 = 2 3/4"
			12 = 3"
D = Offset			13 = 3 1/4"
			14 = 3 1/2"
			15 = 3 3/4"
E = Truncated		7 = No. 7RW	16 = 4"
		No. 3MT	17 = 4 1/4"
			18 = 4 1/2"